

# **Current Transducer LT 4000-T**


For the electronic measurement of currents: DC, AC, pulsed..., with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).







# $I_{PN} = 4000 A$



### **Electrical data**

I <sub>PN</sub> I <sub>P</sub> R <sub>M</sub>	Primary nominal r.m.s. current Primary current, measuring range Measuring resistance		$4000$ $0 \pm 6000$ $R_{M min}$ $R_{M max}$		A A
	with ± 24 V	@ $\pm 4000 \text{ A}_{max}$ @ $\pm 6000 \text{ A}_{max}$	0 0	10 2	$\Omega \ \Omega$
I <sub>SN</sub> K <sub>N</sub> V <sub>C</sub> I <sub>C</sub> V <sub>d</sub>	Secondary nominal r.m.s Conversion ratio Supply voltage (± 5 %) Current consumption R.m.s. voltage for AC iso		800 1:500 ± 24 35(@±:	0 24V)+ <b>I</b> s	mA V mA kV

## **Accuracy - Dynamic performance data**

<b>Χ</b> <sub>G</sub> <b>ε</b> <sub>L</sub>	Overall accuracy @ $\mathbf{I}_{PN}$ , $\mathbf{T}_{A}$ = 25°C Linearity		± 0.5 < 0.1		% %
I <sub>о</sub> I <sub>от</sub>	Offset current @ $\mathbf{I}_{\mathrm{P}} = 0$ , $\mathbf{T}_{\mathrm{A}} = 25^{\circ}\mathrm{C}$ Thermal drift of $\mathbf{I}_{\mathrm{O}}$	- 25°C + 70°C	Typ ± 0.6	Max ± 0.8 ± 0.8	mA mA
t <sub>,</sub> di/dt f	Response time $^{1)}$ @ 90 % of $\mathbf{I}_{\text{P max}}$ di/dt accurately followed Frequency bandwidth (- 1 dB)		< 1 > 50 DC 1	100	μs Α/μs kHz

### General data

$T_A$	Ambient operating temperature	- 25 + 70	°C
T <sub>s</sub>	Ambient storage temperature	- 40 + 85	°C
$\mathbf{R}_{\mathrm{s}}$	Secondary coil resistance @ T <sub>A</sub> = 70°C	15	Ω
m	Mass	12.1	kg
	Standards	EN 50178: 1997	

#### **Features**

- Closed loop (compensated) current transducer using the Hall effect
- Isolated plastic case recognized according to UL 94-V0.

## **Advantages**

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- · Current overload capability.

### **Applications**


- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

Note:  $^{1)}$  With a di/dt of 100 A/ $\mu$ s.

070405/6



## **Dimensions LT 4000-T** (in mm. 1 mm = 0.0394 inch)

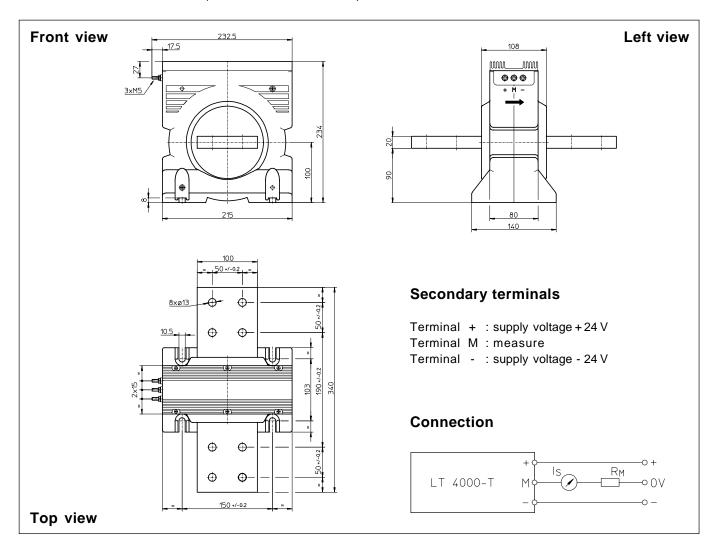

### Mechanical characteristics

- General tolerance
- Fastening
- Connection of primary
- Connection of secondary Fastening torque
- ± 1 mm
- 4 holes  $\varnothing$  10.5 mm or by the primary bar 8 holes  $\varnothing$  13 mm
- M5 threaded studs
- 2.2 Nm or 1.62 Lb Ft

## **Remarks**

- $I_s$  is positive when  $I_p$  flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.